

Industri*Æ*



WE POWER THE FUTURE



LITHIUM-ION Battery System for Industrial Applications



TECHNICAL INFORMATION

180S01P BATTERY SYSTE	М
Nominal energy of a single battery block	62.3 kWh
Maximum no. of battery blocks connected into one system	80
Total capacity of the battery system with maximum number of battery blocks connected	5 MWh
Configuration	180S01P (15 x 12S01P modules)
Compatibility with the industrial dimensional standard (width x depth x height)	800 mm x 800 mm x 2000 mm + 100 mm (pedestal) (ICT series type: 42U)
Estimated weight of a single battery block	670 kg
Nominal capacity of a single battery block @ 25°C, 1/3C (100% DOD - 4.15 V 2.7 V / cell)	94 Ah
Nominal voltage	662.4 VDC
Output voltage range	540 VDC 747 VDC
External power supply voltage	12 VDC
Maximum discharge current of a single battery block @ 25°C	230 A
Maximum charging current of a single battery block @ 25°C	100 A
Continuous supply current for a single battery block @ 12 VDC	~1 A
Pulse supply current (75 ms) for a single battery block @ 12 VDC	~8 A
Certification	UN38.3, CE
Operating temperature range	0°C +55°C
Recommended temperture	23°C
Slave ESS block control via data bus	via CAN bus
Communication interface	MODBUS TCP
LCD display with the battery system's current status	7" display in Master ESS
Battery charge indicator of a single battery block	LED indicator
Remote monitoring with event log	(option) – online
Remote servicing	Software upgrades and system monitoring possible via remote access
Pre-charge	External system required.
IP class	IP55
High-current connection between the battery blocks	Busbar output
Estimated number of cycles (until 70% SOH @ 25°C)	6000
Depth of Discharge (DoD)	99%
Battery chemistry	Li-ion NMC / LMO

APPLICATIONS

INDUSTRI energy storage systems may be used in a variety of industrial and commercial applications.

Commercial and industrial applications.

INDUSTRIÆ can help energy producers and distributors optimize the investment in energy distribution solutions by storing the energy at times of lower demand and releasing it during peak hours. INDUSTRIÆ is a unique solution for Demand Side Response applications (DSR) to resolve the issues of grid instabilities and support grid balancing.

Off-grid and micro-grid applications

INDUSTRIÆ is an ideal alternative to diesel generators in both industrial, commercial or community applications. The solution may offer flexible and grid-independent power supply connected to renewable energy sources (e.g. solar and/or wind generators) offering reduced maintenance cost and minimized carbon foot-print.

Vehicle charging stations


INDUSTRIÆ as an end-point charging station is the answer to a growing demand for charging personal and commercial electric vehicles. Scalable and flexible configuration of the INDUSTRIÆ may become a large scale charging station for a fleet of e-buses, as well as a smaller, road-side station for electric cars.

Temporary or energy back-up applications

The flexible nature of the INDUSTRIÆ may offer a handful of non-standard applications. Built into a container, the solution can offer temporary power supply of even 1MWh/container.

Possible application may include:

- emergency power supply for industrial or commercial use (e.g. during times of black-out risk)
- power supply to mass events (e.g. concerts, public gatherings, etc)
- mobile power banks (e.g. for maintenance teams of energy distributors or grid operators)
- power supply to remote telecom transmission equipment

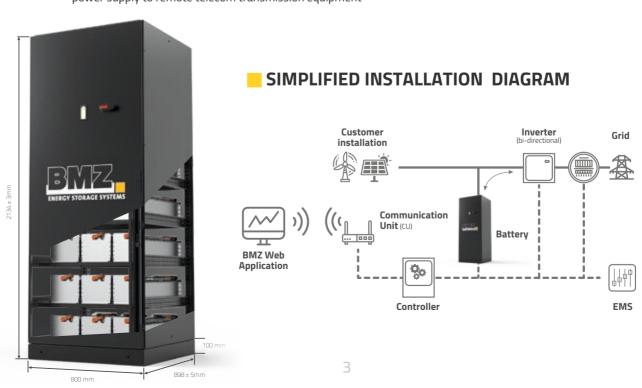



FEATURES

- Master and slave configuration of up to 80 battery blocks connected in parallel
- Real-time monitoring of the battery system's operating status:
- Maximum possible charging current
- Maximum possible discharge current
- Current SOC (State of Charge)
- No. of active batteries
- Real-time value of charge/discharge
- Real-time voltage value
- Remaining capacity of the battery system
- Power consumption meter
- Average temperature / Maximum temperature / Minimum temperature
- Warnings / Errors
- Current operating status (charging, discharging, ready)
- Communication via the MODBUS TCP protocol.
- Monitored data logged and stored on BMZ servers.
 Web application available to analyze collected data, create reports, graphs, and fault messages.
- Digital outputs facilitating the integration of the battery system with a range of converters.



INVERTER POWER (kW)

	kWh	120 kW	240 kW	360kW	480 kW	600 kW	720 kW	840kW	960 kW
1x INDUSTRIÆ	62,3								
2x INDUSTRIÆ	124,6								
3x INDUSTRIÆ	186,9								
4x INDUSTRIÆ	249,2								
5x INDUSTRIÆ	311,5								
6x INDUSTRIÆ	373,8								
7x INDUSTRIÆ	436,1								
8x INDUSTRIÆ	498,4								

TECHNICAL SPECIFICATIONS OF LITHIUM-ION BATTERY SYSTEM FOR INDUSTRIAL AND COMMERCIAL ENERGY STORAGE

INDUSTRI lithium-ion battery solution is a purpose-designed Industrial Energy Storage System (IESS). Its modular structure offers energy capacity from 62.3kWh up to 5MWh. **INDUSTRI** IESS may easily be adapted to a variety of converters and high voltage end-points thanks to MODBUS TCP connectivity and a number of digital outputs.


To facilitate easy expansion of the system with no modification to control cabling, CAN bus is used for communication between the individual battery blocks. Integrated controls and built-in BMS allow INDUSTRIÆ solution to be installed in applications where energy buffering is required.

The dimensions of an individual battery block complies with the metric standard used in the energy industry.





MANY ENVIRONMENTS - ONE SYSTEM

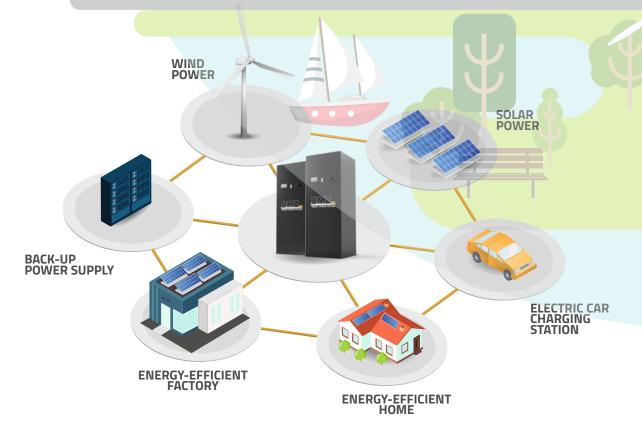



BMZ GmbH

Am Sportplatz 28 63791 Karlstein am Main Germany

Phone +49 6188-9956-0 Fax +49 6188-9956-900

kontakt@bmz-group.com www.bmz-group.com

BMZ USA Inc.

2656 Lishelle Place Virginia Beach, VA 23452 USA

Phone +1 757 821-8494 Fax +1 757 821-8499

contact-usa@bmz-group.com www.bmz-group.com

BMZ Company Ltd.

2nd Building, N O.2 Jinlong Street Baolong Industry Zone, Longgang 518116 Shenzhen / China

Phone +86 755 89775-800 Fax +86 755 89775-900

sales@bmz-group.com www.bmz-group.com

BMZ Japan

KK Takano 2-436, Misato, Saitama, 341-0035 Japan

Phone +81 (0) 48 951 406 5

Tokio.Kobayashi@bmz-group.com www.bmz-group.com

BMZ Poland Sp. z o.o.

Alberta Einsteina 9 44-109 Gliwice Poland

Phone +48 327842 450 Fax +48 327842 451

BMZPolandSales@bmz-group.com www.bmz-group.com

BMZ France S.A.R.L.

45 Boulevard Vincent Auriol 75013 Paris France

Phone: +33 (0)9 87 37 42 62

jean-marc.brunet@bmz-group.com www.bmz-group.com

© BMZ 04.2019

All rights reserved. Although great care has been taken in preparing this printed matter, BMZ cannot be held responsible for any errors or omissions. All information here is subject to change without notice.