

LI-ION



CELL – BMZ 18650 29EE

## TECHNICAL INFORMATION

Lithium Ion Rechargeable Battery

### Name and Code

- Cell Name: BMZ 18650 29EE
- Cell Code: 38698

### Cell Shape and Weight


- Cell Shape: cylindrical
- Weight: max. 47.0 g

### Safety Regulation

- UN, IEC, UL

### Size (with plastic tube):

- Diameter: 18.4 mm
- Length: 65.15 mm

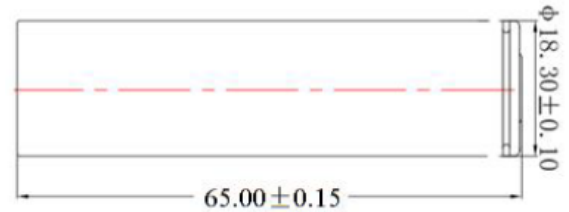

**HIGH ENERGY**

### Performance


(at room temperature, 2.5 V cut off)

Nominal Capacity (0.2 C discharge)	2750 mAh	
Rated Capacity (0.2 C discharge)	2700 mAh	
Continuous Maximum Discharge Current	8.25 A	
Nominal Voltage	3.6 V	
Allowable Environment Temperatures	Charging: 0°C – 45°C	Discharging: -20°C – 60°C
Storage Temperatures	1 month: 0°C – 60°C	3 months: 0°C – 45°C
Internal Impedance	< 30 mΩ	measured at AC 1 kHz


- Charge Method: CC-CV
- Nominal Charge Current: 1.375 A
- Maximum Charge Current: 5.5 A
- Maximum Charge Voltage: 4.2 V
- Discharge Cut Off Voltage: 2.5 V




**DISCHARGE RATE CHARACTERISTICS**

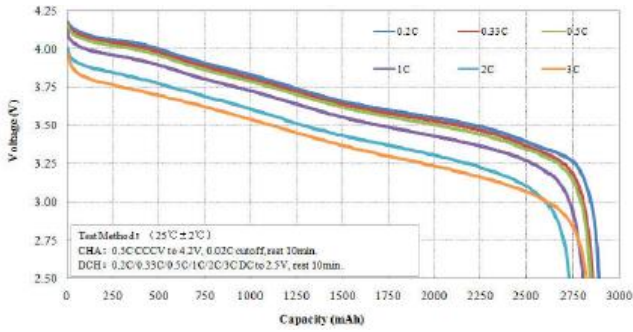


**DISCHARGE TEMPERATURE CHARACTERISTICS**

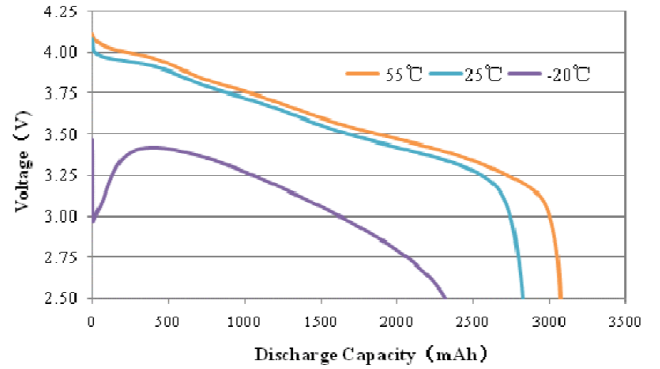

**CHARGE CHARACTERISTICS**

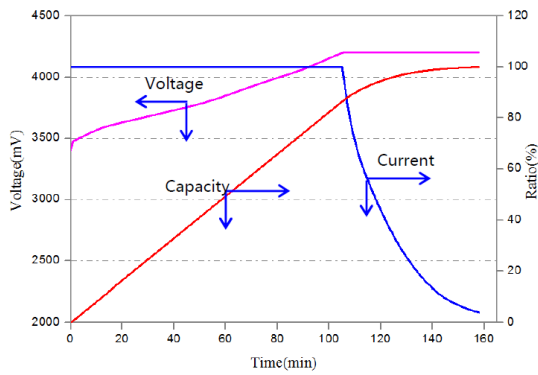

**CYCLE LIFE CHARACTERISTICS**

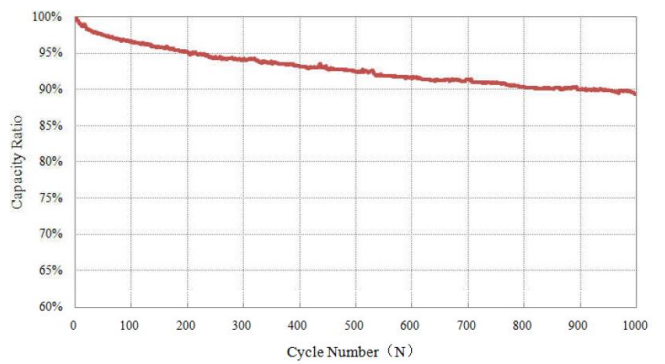

Data is for reference use only. Not guarantee value.

BMZ GmbH | Am Sportplatz 28 | 63791 Karlstein am Main | Germany

Phone +49 61 88-9956-0 | Fax +49 61 88-9956-900 | mail@bmz-group.com | www.bmz-group.com